

The GHA12 Benefits


- / Frequency inverter in hoisting and trolley motions (standard)
- / Load limit device with monitoring (standard)
- / Adjustable trolley with no component modifications required
- / All gears enclosed (including trolley drive gears)
- / Radio transmitter with weight read out (optional)
- / Tension roller, no counter weight
- / Trolley wheels driven on opposite flanges
- / UL/CSA/IEC controls

GH Cranes is a leading manufacturer of material handling solutions that can be designed and adapted to be used in a wide range of industries around the world. Since 1958, we have designed, manufactured and installed products in over 70 countries

LGH Cranes Co., Ltd.
(GH Thailand Factory)
Banbueng Branch 137/4
Moo 8 Nongsak-
Noenmok Rd.
Nongrun,
Banbueng
CHONBURI, 20220
(Thailand)



Load control

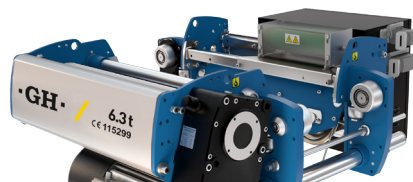


All inverter




Remote control

Select the Right Hoist flip sheet for details → → →



STANDARD MODELS

CAP.	MODEL	SPEED	FALLS	DUTY	H1	H2	H3
1.0	GHA12R012110--M6	10	2/1	M6	9,2	16,1	21,8
1.0	GHA12R014105--M6	5	4/1	M6	4,2	7,7	10,5
1.6	GHA12R012110--M5	10	2/1	M5	9,2	16,1	21,8
1.6	GHA12R014105--M6	5	4/1	M6	4,2	7,7	10,5
2.0	GHA12R024105--M6	5	4/1	M6	4,2	7,7	10,5
2.5	GHA12R024105--M6	5	4/1	M6	4,2	7,7	10,5
3.2	GHA12R034105--M5	5	4/1	M5	4,2	7,7	10,5

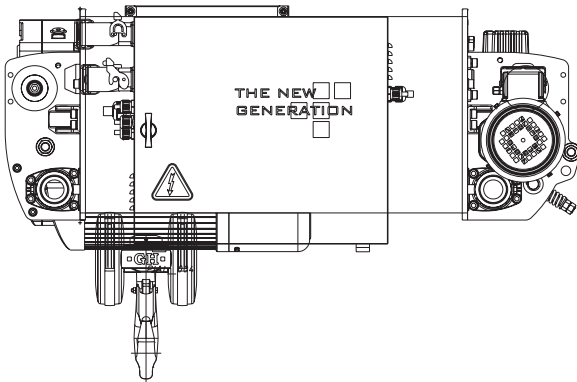

STANDARD FREQUENCY INVERTER IN HOISTING MOTION

4/1 FALLS

Nominal Speed with full load	5	m/min
Speed when load is <= 25%	8	m/min

2/1 FALLS

Nominal Speed with full load	10	m/min
Speed when load is <= 25%	16	m/min

OPTIONAL 2-SPEED MOTOR

4/1 Falls	5 / 1,25	m/min
2/1 Falls	10 / 2,5	m/min

WIDE SELECTION RANGE

